


Technical sheets ISEO x1R Easy electronic lock

POWER SUPPLY with battery pack (specify when ordering)

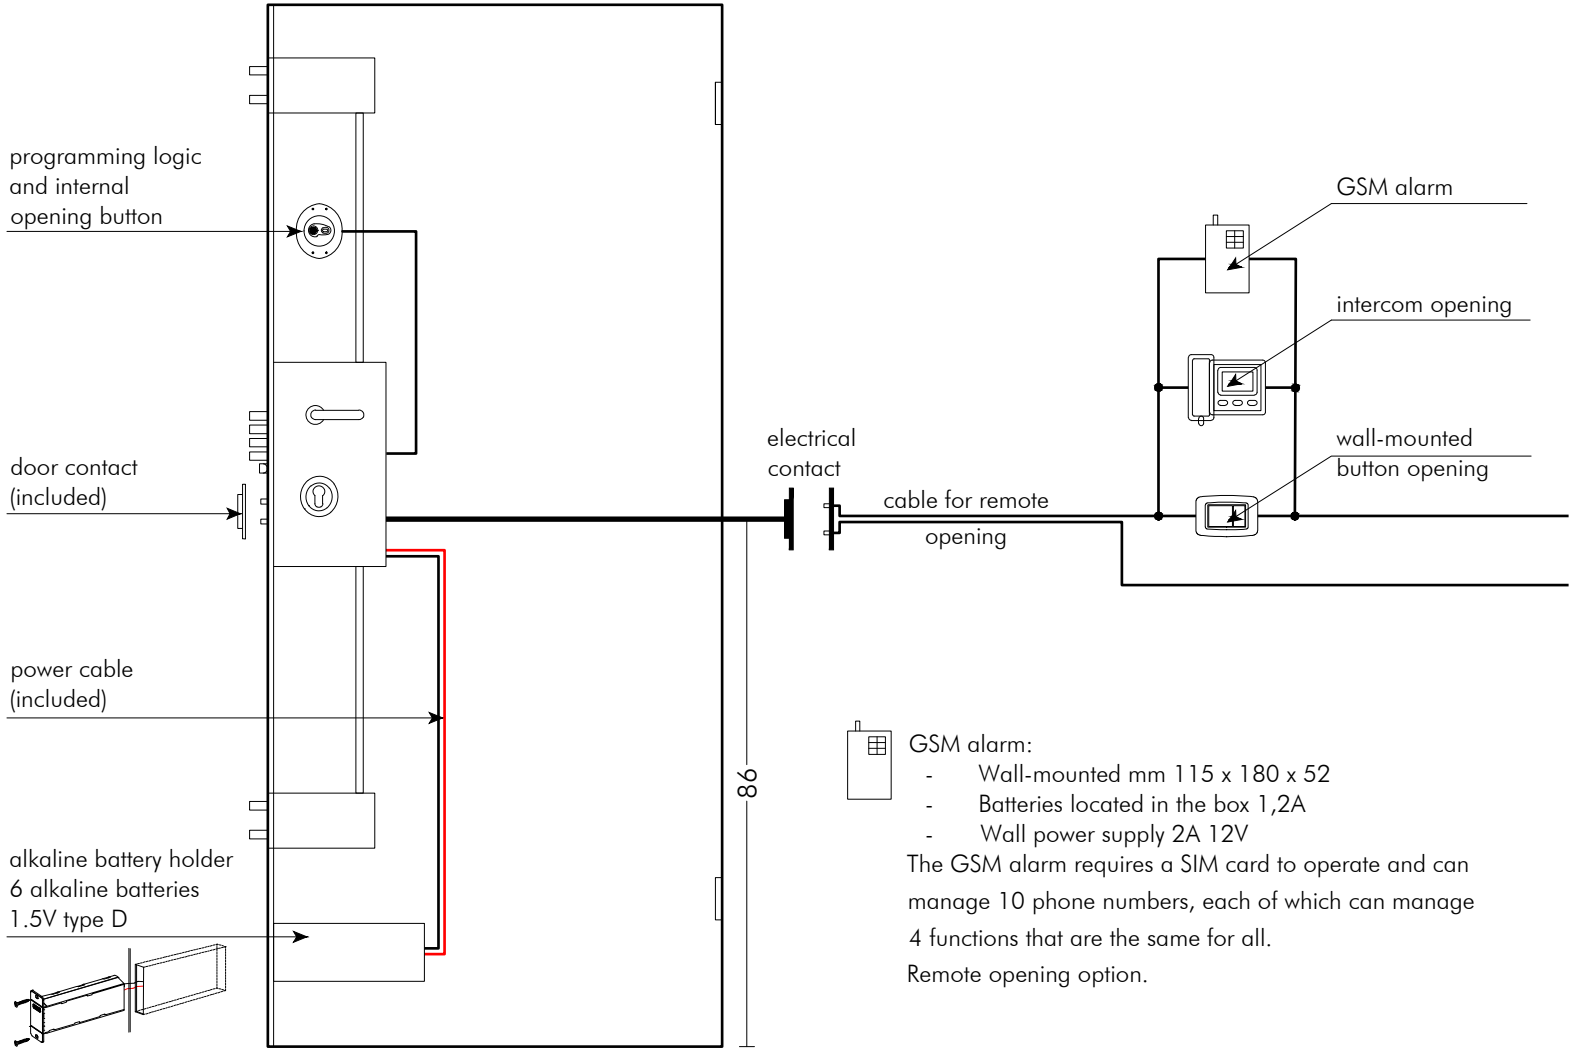


GSM alarm:

- Wall-mounted mm 115 x 180 x 52
- Batteries located in the box 1,2A
- Wall power supply 2A 12V

The GSM alarm requires a SIM card to operate and can manage 10 phone numbers, each of which can manage 4 functions that are the same for all.


Remote opening option.

POWER SUPPLY by mains (specify when ordering)

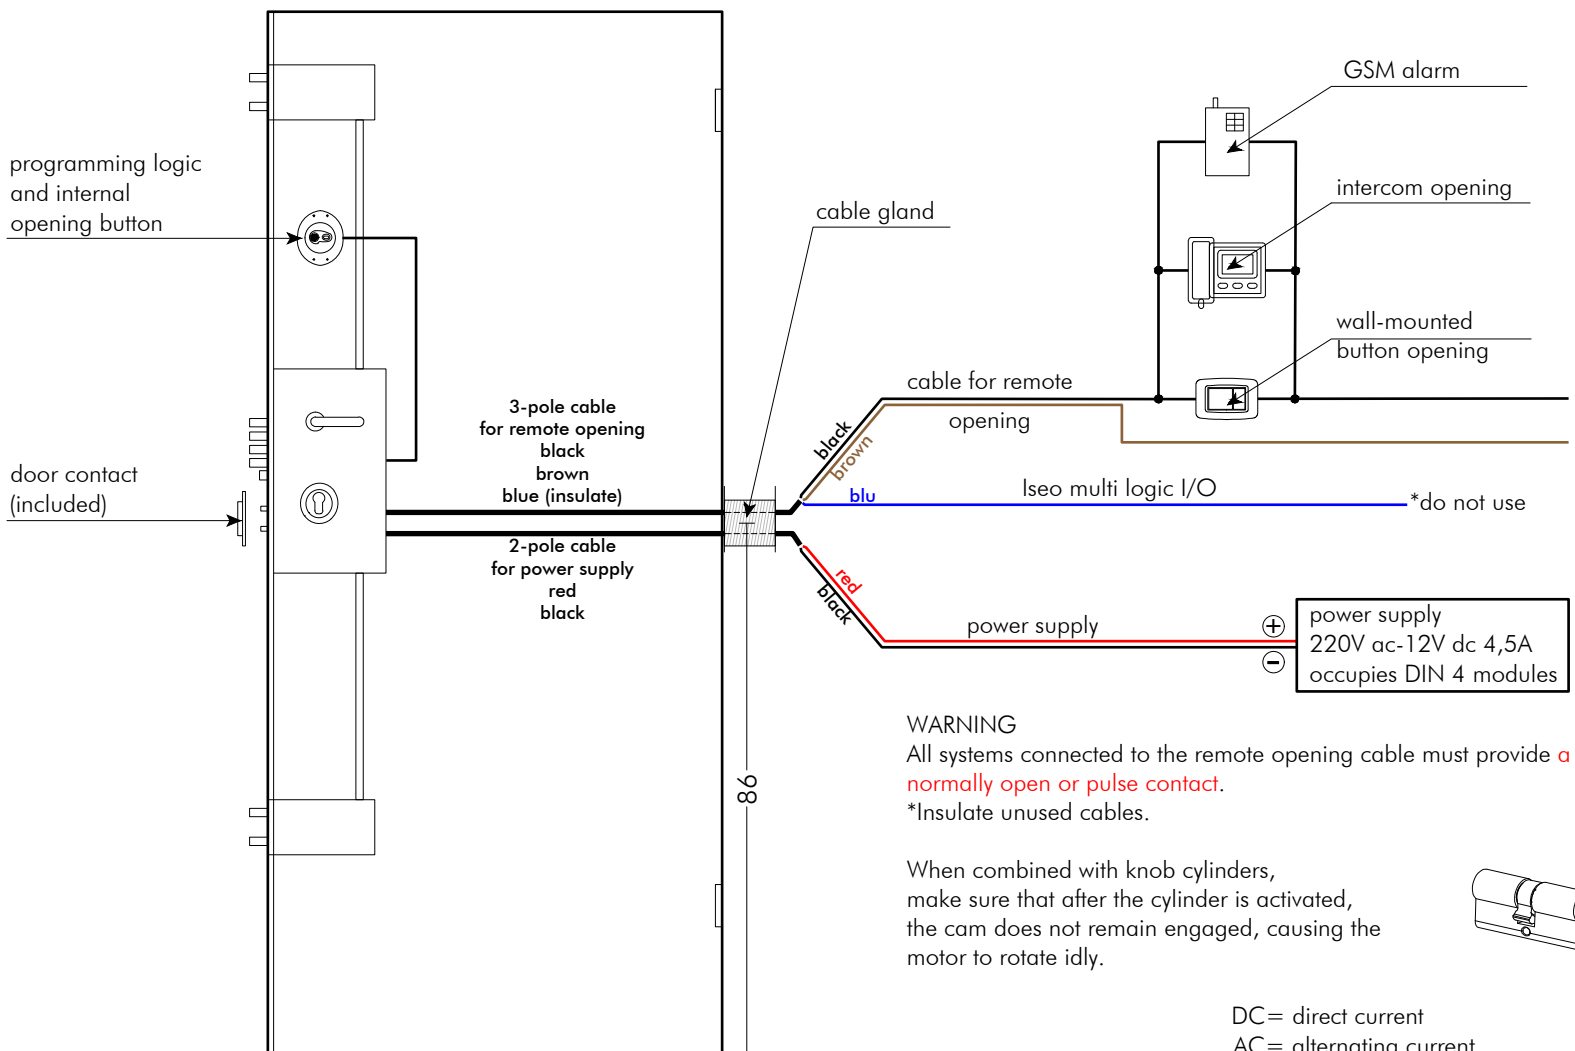

WARNING
 All systems connected to the remote opening cable must provide a **clean normally open or pulse contact**.
 *Insulate unused cables.

When combined with knob cylinders, make sure that after the cylinder is activated, the cam does not remain engaged, causing the motor to rotate idly.



DC= direct current
 AC= alternating current