


Technical sheets ISEO X1R Smart electronic lock

POWER SUPPLY by mains

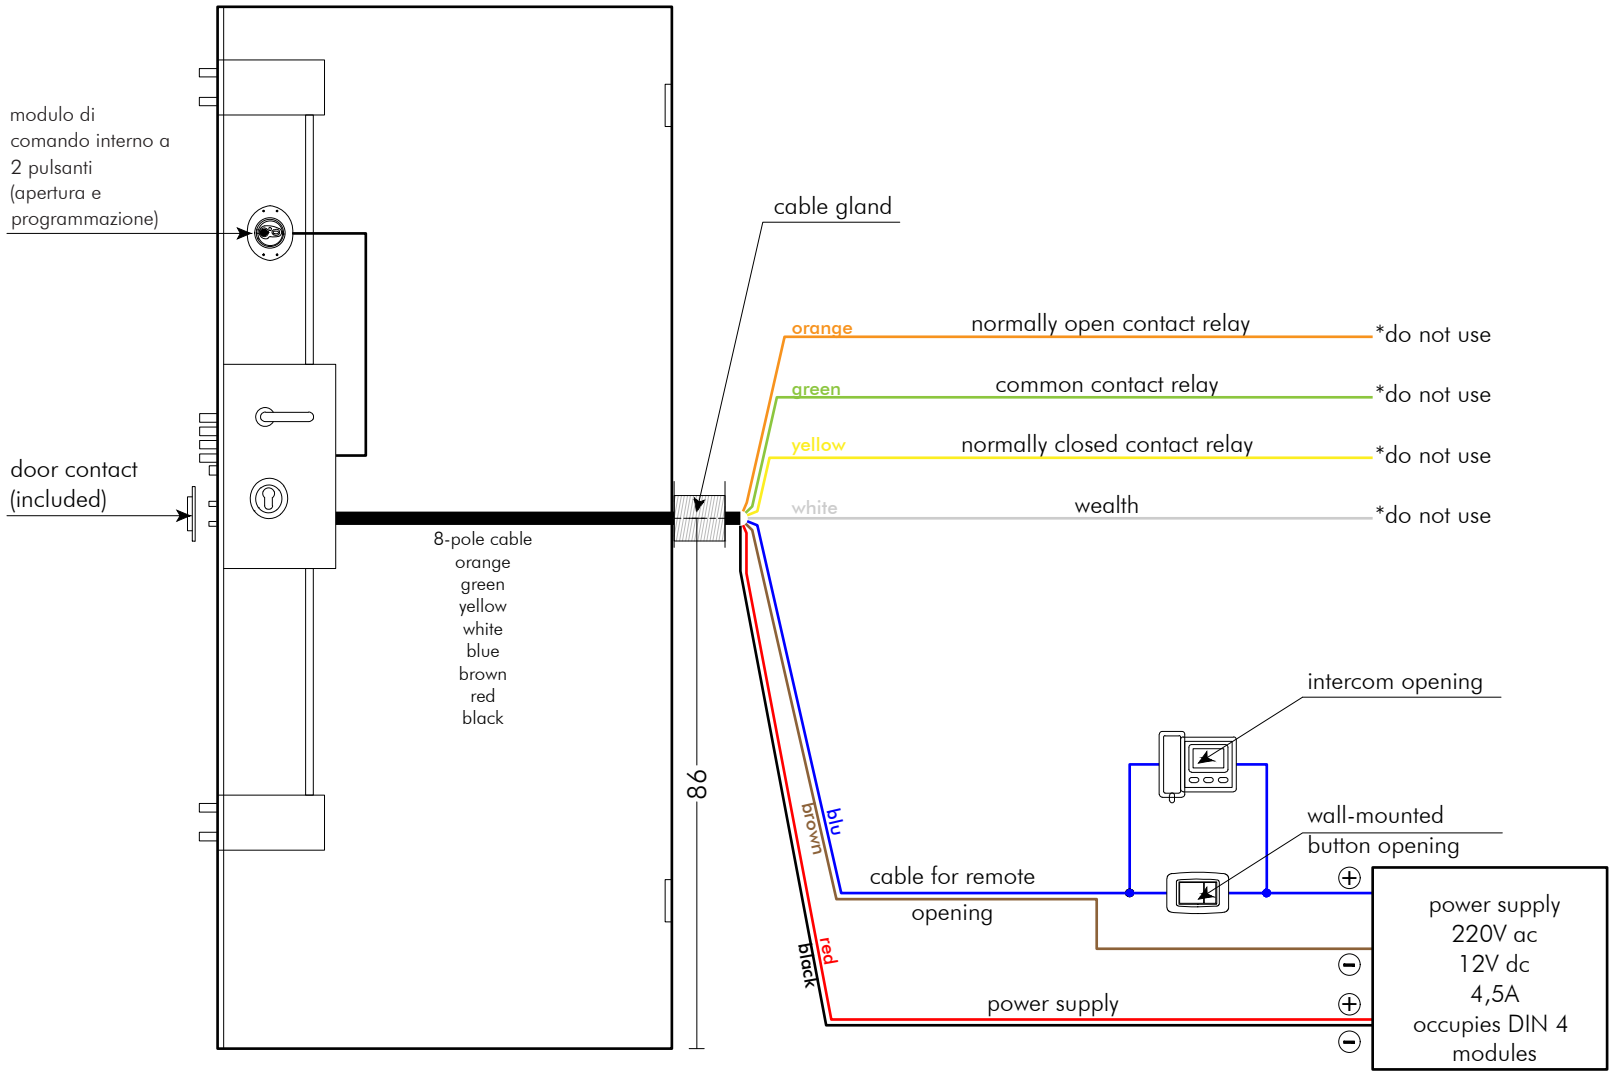


WARNING

All systems connected to the remote opening cable must provide a **clean normally open or pulse contact**.

*Insulate unused cables.

When combined with knob cylinders, make sure that after the cylinder is activated, the cam does not remain engaged, causing the motor to rotate idly.



DC= direct current
AC= alternating current