


## Technical sheets **CISA 59607 panic handlebar**

always combine with Pull opening

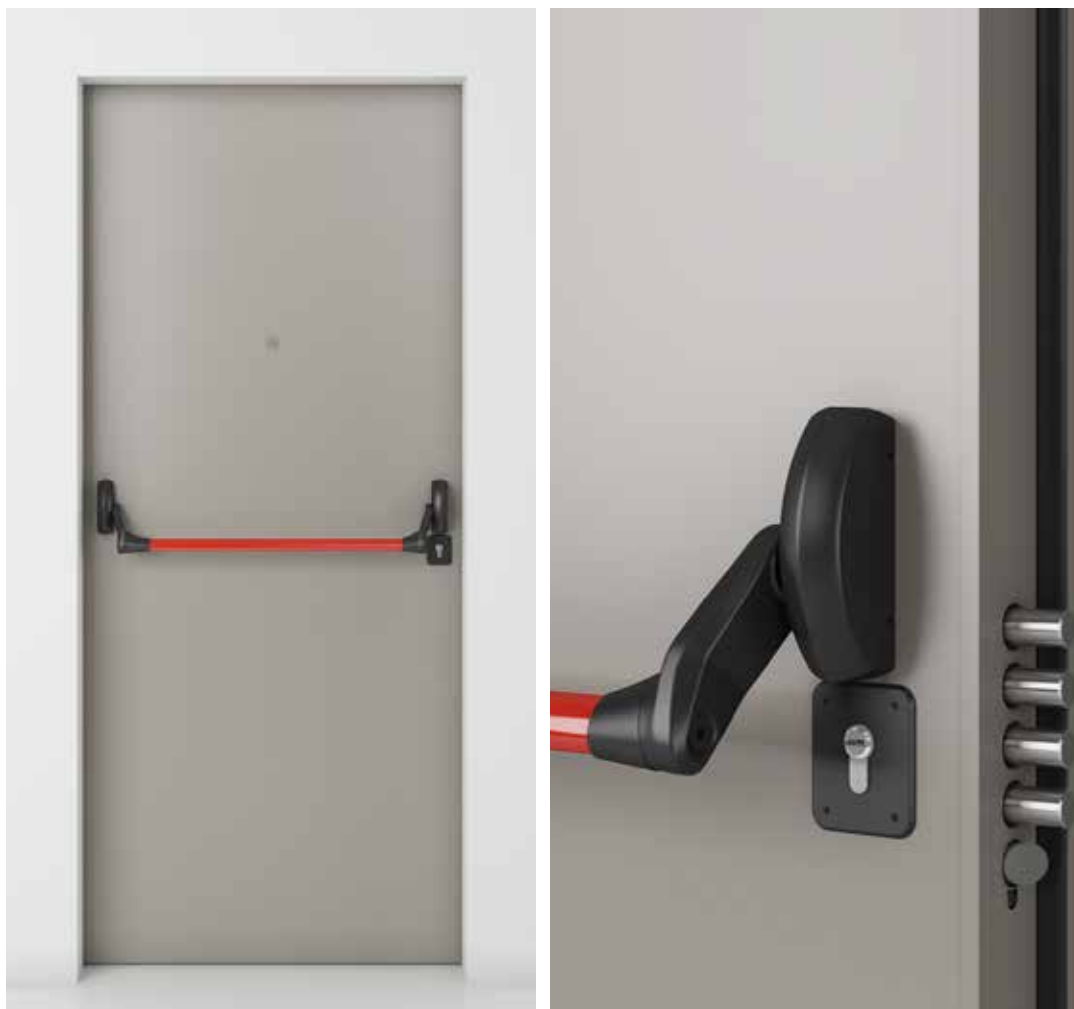

Panic handlebar CISA 59607  
unlock only the latch bolt.

**WARNING!** Once locked, the bolts can only  
be unlocked by turning the key again.

Features of panic handlebar compared to standard EN 1125:1997

	CLASSIFICATION LEVELS	CLASSIFICATION
Category of use	3	3 (public place)
Duration	6/7	7 (200.000 cycles)
Door mass	5/6/7	6 (maximum weight 200 kg)
Fire resistance	0/A/B	0 (not suitable for use on fire doors)
Personal safety	1	1 (safe when in use)
Corrosion resistance	3/4	4 (extremely high resistance)
Property safety	2	2 (secondary to the safety of people)
Bar protrusion	1/2	1 (up to 150 mm)
Bar operation	A/B	A (operated by a push bar)
Door application range	A/B/C	B (one leaf security door)