

Technical sheets **MOTTURA GORILLA 86530 panic handlebar**

always combine with Pull opening




Mottura Gorilla 86530 panic handlebar and security lock.



The Mottura Gorilla panic handlebar is combined with its lock and approved as an emergency exit.

Features of panic handlebar and security locks in relation to Directive 89/106/EEC

	CLASSIFICATION LEVELS	CLASSIFICATION
Category of use	3	3 (public place)
Duration	6/7	7 (200.000 cycles)
Door mass	5/6/7	6 (maximum weight 200 kg)
Fire resistance	0/A/B	B (suitable for use on fire and smoke doors)
Personal safety	1	1 (safe when in use)
Corrosion resistance	3/4	4 (extremely high resistance)
Property safety	2	2 (secondary to the safety of people)
Bar protrusion	1/2	1 (up to 150 mm)
Bar operation	A/B	A (operated by a push bar)
Door application range	A/B/C	B (one leaf security door)

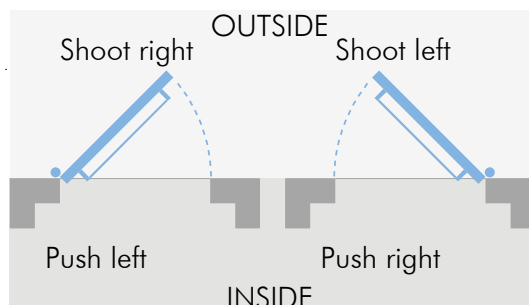

NOTE: To correctly indicate the opening direction of a security door with a panic bar, use the pull system. To avoid countless misinterpretations, when ordering this item, always accompany your order with a floor plan drawing to clarify the desired opening direction. It is even better if you indicate the model of the panels on the desired side on the same drawing if they are different on the inside and outside.

TECHNICAL INFORMATION

- The Dolmen security door with Mottura panic handlebar can be used as an emergency exit.
- The certification of the Mottura Gorilla 86530 handlebar is only for a one leaf security door with a maximum size of 130x250 cm.
- The maximum size we recommend is 119x249 cm.